


# ProCare Hospital Door Lamp

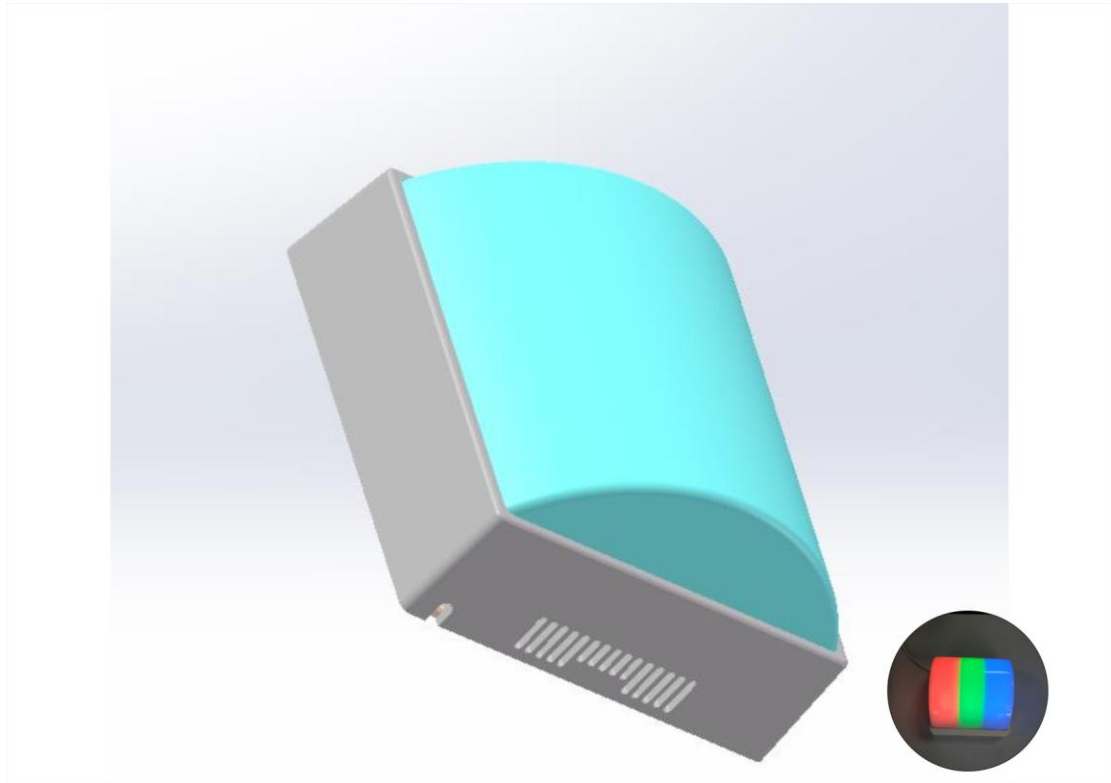

- ★ PC programmable. USB id programmer.
- ★ PLL 430-470M, POCSAG
- ★ 5VDC input. Backup battery available
- ★ 3 colors and color combine, flash or constant.
- ★ 3 steps sound alerts.
- ★ 8 modes available.
- ★ 400 buttons supported. Key mode or button mode.
- ★ Fixed: sticker or screws.

# Specification (POCSAG)

|                        |  |
|------------------------|--|
| Frequency Range:       | 430-930MHz   |
| Cap Codes:             | 8  |
| Receiver Type:         | Synthesized  |
| Baud Rate:             | 512, 1200, 2400 bps  |
| Paging Sensitivity:    | -108DB @ 512 bps<br>-106DB @ 1200 bps<br>-104DB @ 2400 bps |
| Channel Spacing:       | 25 KHz Frequency   |
| Deviation:             | +/-4.5 KHz   |
| Frequency Stability:   | +/- 10 PPM   |
| Selectivity:           | > 55dB   |
| Image Rejection:       | > 52dB   |
| Spurious Rejection:    | > 55dB   |
| Intermediation:        | > 50dB   |
| Sounds :               | > 90dB   |
| Brightness:            | >300 MCD   |
| Weight:                | 110 g (no battery)   |
| Dimensions:            | 85 x 85x60 mm  |
| Power :                | DC5V 1A  |
| Operating Temperature: | -10o to 50o C  |